
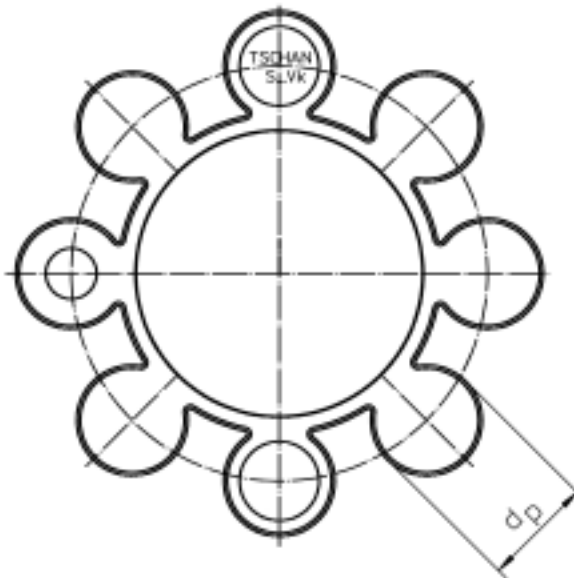


Elastische Zwischenringe, Bauart TSCHAN-S  
 Elastic intermediate rings, type TSCHAN-S  
 Les flectors élastique, modèle TSCHAN-S

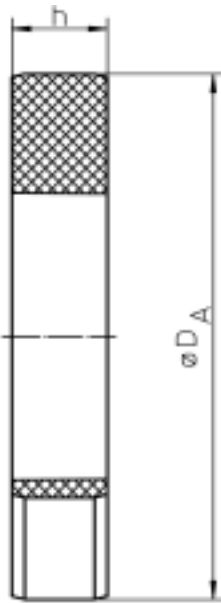

VKR 93 Sh A —

PB 72/82 Sh A —

VK 60 Sh D —

VKB 84 Sh A —



Größe Size Taille	$D_A$ [mm] / [inch]	h [mm] / [inch]	$d_p$ [mm] / [inch]	Anzahl der Puffer Number of Buffers Nombre de plots	Gewicht Weight Poids [g] / [lb]
20	18,7 / 0,74	7 / 0,28	7,0 / 0,28	4	1 / 0,0025
30	28 / 1,10	10 / 0,39	10,8 / 0,43	4	4 / 0,01
40	39 / 1,54	12 / 0,47	15,0 / 0,59	4	9 / 0,02
50	48 / 1,89	12 / 0,47	19,2 / 0,76	4	15 / 0,03
70	70 / 2,76	18 / 0,71	20,0 / 0,79	6	40 / 0,09
85	82 / 3,23	18 / 0,71	22,0 / 0,87	6	60 / 0,13
100	100 / 3,94	20 / 0,79	27,7 / 1,06	6	90 / 0,19
125	121 / 4,76	25 / 0,98	32,0 / 1,26	6	160 / 0,35
145	139 / 5,47	30 / 1,18	36,0 / 1,42	6	240 / 0,52
170	166 / 6,54	30 / 1,18	36,0 / 1,42	8	330 / 0,72
200	194 / 7,64	35 / 1,38	40,1 / 1,58	8	480 / 1,06
230	222 / 8,74	35 / 1,38	45,1 / 1,78	10	760 / 1,68
260	253 / 9,96	45 / 1,77	46,0 / 1,81	10	1100 / 2,43
300	294 / 11,58	50 / 1,97	54,0 / 2,13	10	1650 / 3,64
360	350 / 13,78	55 / 2,17	54,0 / 2,13	12	2100 / 4,63
400	393 / 15,47	55 / 2,17	54,0 / 2,13	14	2600 / 5,73